



Pearl[®]

Water Systems

Steel Tanks
with Diaphragm



MNP

The MNP Series is designed for a wide range of applications, including hydropneumatic systems, booster systems, irrigation systems, and the reduction of water hammer effects.

MNP Series tanks, made of steel, have an internal lining constructed from virgin polypropylene and a chlorobutyl membrane, certified by the FDA. The membrane is affixed to the tank wall courtesy of a steel ring. A bronze valve, sealed with a plug and an O-ring, helps prevent air from escaping.

The external coating of the MNP Series tanks, with pearl colored polyurethane paint on an epoxy base, provides hundreds of hours of protection against UV rays and aggressive environments.

Features

- Fixed Butyl membrane
- Stainless Steel water connection
- Internal lining in virgin polypropylene
- Finished with polyurethane paint on epoxy base
- Air-valve plug sealed with O-ring anti-leak
- Does not require maintenance
- Maximum Working Pressure: 150 PSI / 10 bar
- Maximum Working Water Temperature: 90 °C
- IAPMO R&T, ACS, and CE Certifications
- Factory preloaded in Nitrogen (N2) for operation
- 100% Factory Tested



Nomenclature

MNP
MODEL


M = Steel
S = Stainless Steel
N = NPT Thread
P = Pearl


200
VOLUME

Nominal volume
tank in Liters

V
TYPE

S = Spherical
H = Horizontal
V = Vertical

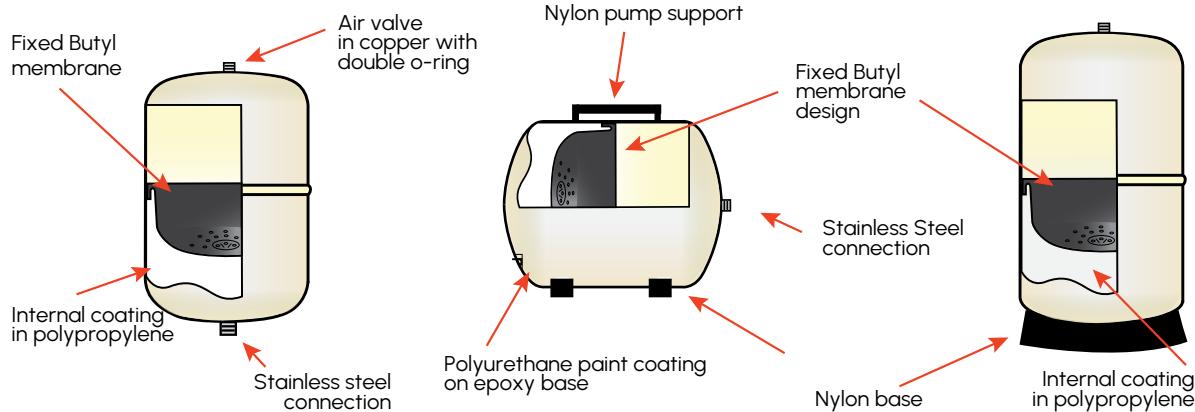

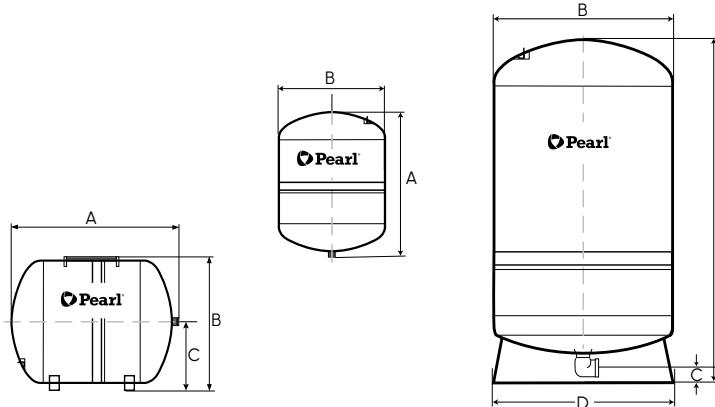

MODEL	MNP STEEL TANK SERIES SPECIFICATIONS										
	NOMINAL CAPACITY	CONNECTIONS	DIMENSIONS						SHIPPING BOX VOLUME	SHIPPING BOX WEIGHT	
			A	[cm]	B	[in]	C	[cm]	[in]	[m³]	[ft³]
MODEL	[lts]	[gal]	[in]	[cm]	[in]	[cm]	[in]	[cm]	[in]	[kgs]	[lbs]
INLINE MODELS											
MNP1S*	1.3	0.35	1/2" SS MALE	20.1	7.9	12.0	4.7	-	-	0.0238	0.84
MNP3S*	3	0.5	3/4" or 1" SS MALE	22.0	8.7	14.0	5.5	-	-	0.0238	0.84
MNP8S	8	2.0	3/4" or 1" SS MALE	30.4	12.0	20.3	8.0	-	-	0.0147	0.52
MNP12S	12	3.2	3/4" or 1" SS MALE	38.4	15.1	22.9	9.0	-	-	0.0218	0.77
MNPE24S	18	4.8	3/4" or 1" SS MALE	364	14.3	280	11	-	-	0.0305	1.08
MNP24S	24	6	3/4" or 1" SS MALE	415	16.3	290	11.4	-	-	0.0402	1.42
MNP35S	35	10	3/4" or 1" SS MALE	56.4	22.2	29.0	11.4	-	-	0.0549	1.94
SNP18S	18	4.5	3/4" or 1" SS MALE	36.4	14.3	28.0	11.0	-	-	0.032	1.13
SNP24S	24	6.0	3/4" or 1" SS MALE	41.5	16.3	29	11.4	-	-	0.0428	1.51
HORIZONTAL MODELS											
MNP20H	20	4.5	3/4" or 1" SS MALE	36.4	14.3	28.0	11.0	14	5.5	0.0374	1.32
MNP24H	24	6.0	3/4" or 1" SS MALE	41.5	16.3	29.0	11.4	14.8	5.8	0.0439	1.55
MNP35H	35	10	3/4" or 1" SS MALE	56.4	22.2	29.0	11.4	14.8	5.8	0.0620	2.19
MNP60H	60	14	3/4" or 1" SS MALE	53.6	21.1	39.0	15.3	19.1	7.5	0.0971	3.43
MNP80H	80	20	3/4" or 1" SS MALE	71.4	28.1	39.0	15.3	19.1	7.5	0.1334	4.71
MNP100H	100	28	1" SS MALE	71.0	28.0	43.0	16.9	22.5	8.9	0.1416	5.00
SNP18H	18	4.5	3/4" or 1" SS MALE	36.4	14.3	28	11	14	5.5	0.0374	1.32
SNP24H	24	6.0	3/4" or 1" SS MALE	41.5	16.3	29	11.4	14.8	5.8	0.0439	1.55
VERTICAL MODELS WITH BASE											
MNP60V	60	14	1" SS FEMALE 90°	59.2	23.4	39.0	15.3	2.9	1.1	0.1042	3.68
MNP80V	80	20	1" SS FEMALE 90°	77.0	30.3	39.0	15.3	2.9	1.1	0.1362	4.81
MNP100V	100	28	1" SS FEMALE 90°	76.5	30.1	43.0	16.9	2.9	1.1	0.1526	5.39
MNP120V	120	32	1" SS FEMALE 90°	114.8	45.2	39.0	15.3	2.9	1.1	0.1917	6.77
MNP130V	130	34	11/4" SS FEMALE 90°	78.5	30.9	55.0	21.7	4.4	1.7	0.2384	8.42
MNP150V	160	44	11/4" SS FEMALE 90°	93.1	36.7	55.0	21.7	4.4	1.7	0.2885	10.19
MNP200V	200	53	11/4" SS FEMALE 90°	106.6	42.0	55.0	21.7	4.4	1.7	0.3401	12.01
MNP235V	235	62	11/4" SS FEMALE 90°	119.6	47.1	55.0	21.7	4.4	1.7	0.3701	13.07
MNP300V	305	81	11/4" SS FEMALE 90°	146.3	57.6	55.0	21.7	4.4	1.7	0.4610	16.28
MNP325V	325	86	11/4" SS FEMALE 90°	110.5	45.5	65.0	25.6	4.4	1.7	0.4958	17.51
MNP450V	450	119	11/4" SS FEMALE 90°	141.0	55.5	65.0	25.6	4.4	1.7	0.6853	24.20

* MNP1S and MNP3S: 4 PIECES / CASE

Factory precharge pressure: 30 PSI / 2 bar

Highly engineered plastic bases. Models MNP325V and MNP450V in steel.

In-line and horizontal models up to 80 liters with 3/4" connection.

Place "R" at the end of the model.

Available in 16 bar.

MNP
STEEL TANKS WITH DIAPHRAGM

 **Pearl**[®]



Stainless steel
models available

