


4PWS05G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

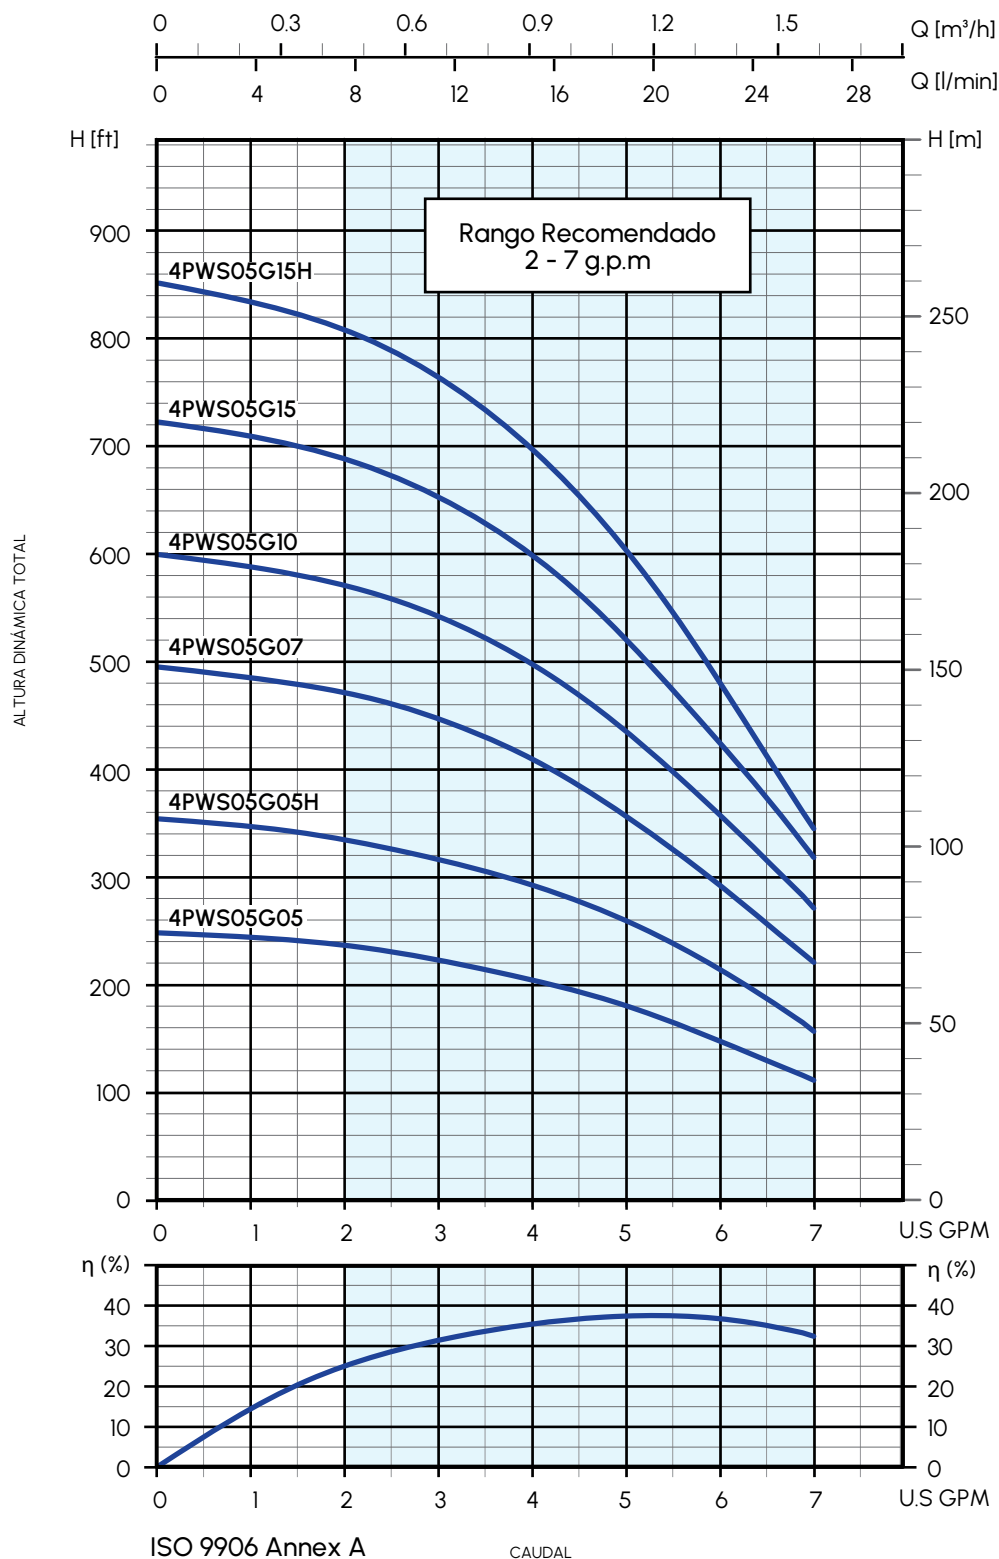

DESCARGA
1 1/4"




4PWS05G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL																			
				l/min 0		1.9		3.8		5.7		7.6		11.4		15.1		18.9		22.7		26.5	
				gpm 0		0.5		1.0		1.5		2.0		3.0		4.0		5.0		6.0		7.0	
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES																			
				M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT
4PWS05G05	9	0.37	0.5	76	248	74	243	73	241	73	240	73	238	68	222	61	201	55	180	43	142	34	112
4PWS05G05H	13	0.37	0.5	109	358	107	350	105	343	104	340	103	338	97	318	89	292	79	260	66	218	49	160
4PWS05G07	18	0.5	0.75	152	497	149	490	147	482	146	480	144	471	136	445	123	405	109	358	88	290	68	222
4PWS05G10	22	0.75	1	183	600	181	595	179	587	177	580	174	570	165	541	152	500	134	438	106	348	84	277
4PWS05G15	26	1.1	1.5	220	722	219	718	216	710	213	700	209	687	198	650	183	600	159	520	129	423	95	312
4PWS05G15H	31	1.1	1.5	259	850	257	842	255	835	250	821	246	807	232	761	212	695	184	602	147	482	109	359

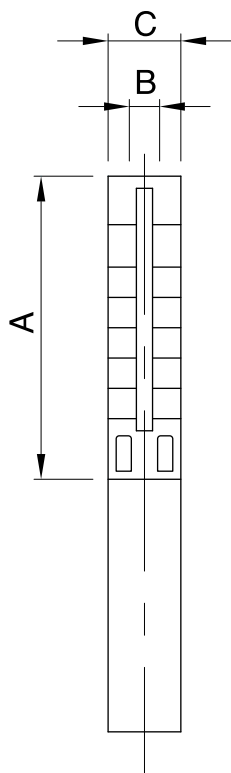

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS05G05	1 13/32	356	NPT 1 1/4"	3 7/8	98	6.4	2.9
4PWS05G05H	1 3/4	440	NPT 1 1/4"	3 7/8	98	8.0	3.6
4PWS05G07	2 5/32	545	NPT 1 1/4"	3 7/8	98	9.7	4.4
4PWS05G10	2 15/32	629	NPT 1 1/4"	3 7/8	98	11.3	5.1
4PWS05G15	2 13/16	713	NPT 1 1/4"	3 7/8	98	12.8	5.8
4PWS05G15H	3 5/16	841	NPT 1 1/4"	3 7/8	98	19.5	8.8

C* : Diámetro máximo de la bomba cuando es ensamblada con un cable de alimentación