


4PWS07G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

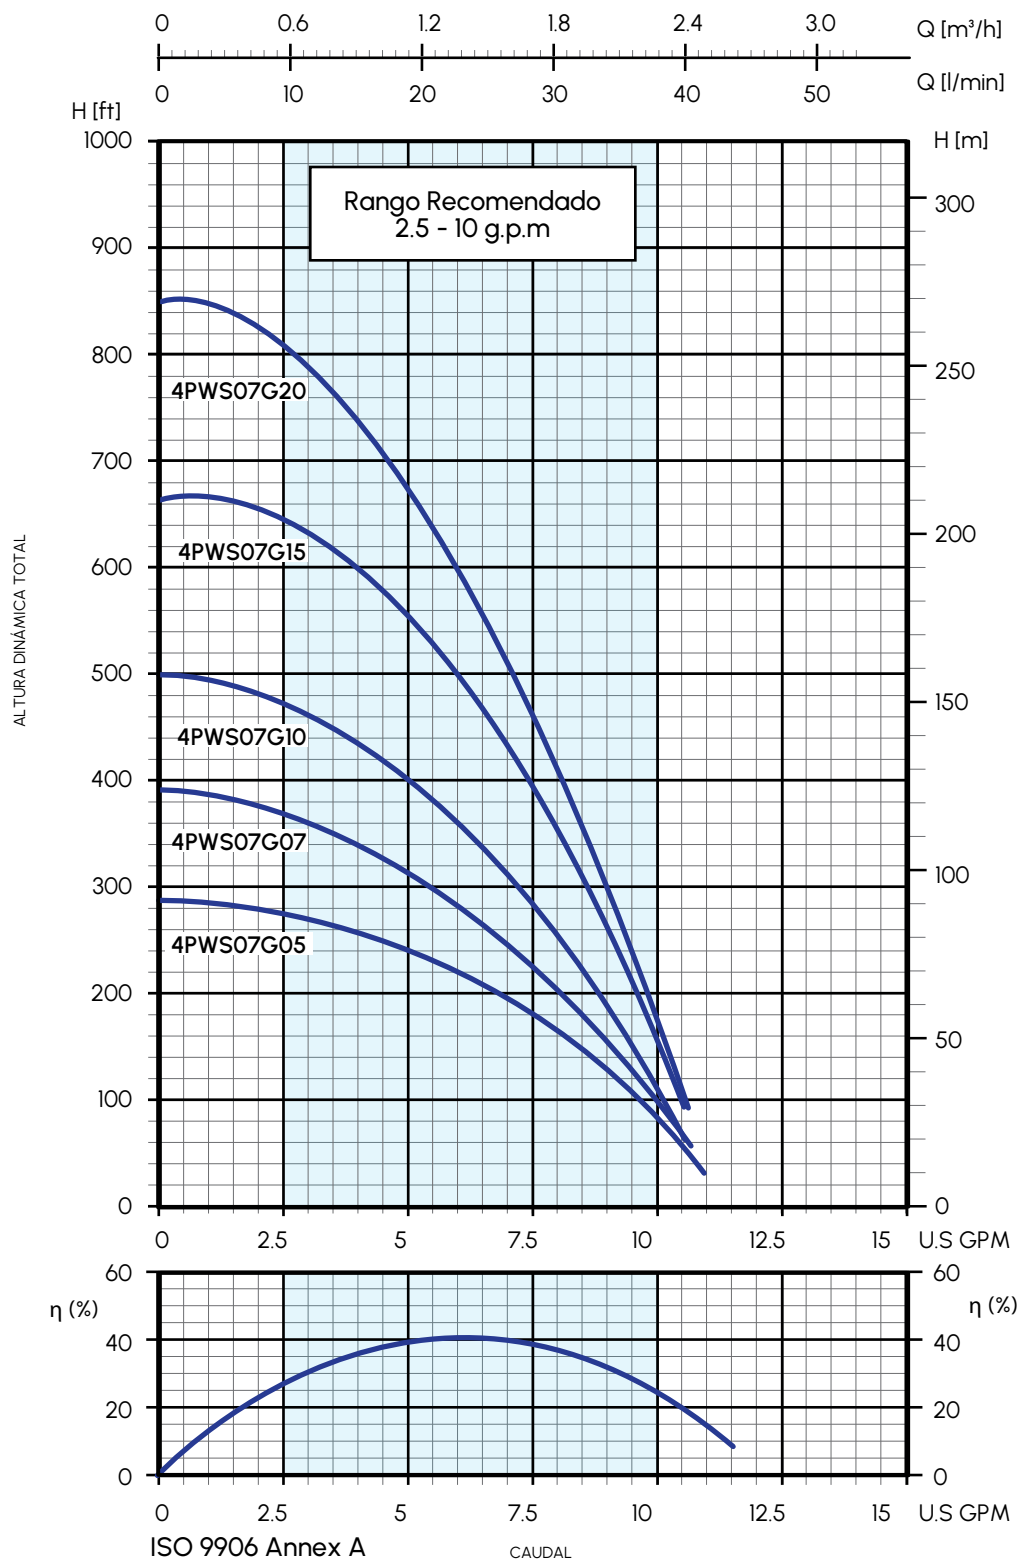

DESCARGA
1 1/4"




4PWS07G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL											
				l/min 0		9.5		18.9		28.4		37.9			
				gpm 0		2.5		5.0		7.5		10.0			
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES											
				M	FT	M	FT	M	FT	M	FT	M	FT		
4PWS07G05	11	0.37	0.5	88	288	84	275	73	240	55	180	24	80		
4PWS07G07	15	0.5	0.7	119	390	113	370	96	316	69	225	30	100		
4PWS07G10	19	0.75	1	152	500	145	476	122	400	87	284	31	102		
4PWS07G15	26	1.1	1.5	201	661	196	643	169	556	119	390	46	150		
4PWS07G20	32	1.5	2	259	850	247	810	205	672	140	460	55	180		

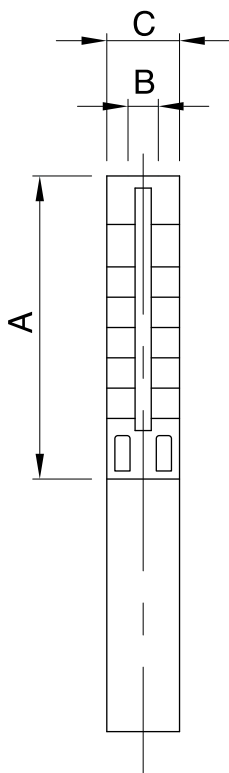

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS07G05	15 3/4	398	NPT 1 1/4"	3 7/8	98	7.4	3.4
4PWS07G07	19	482	NPT 1 1/4"	3 7/8	98	9.1	4.1
4PWS07G10	22 9/32	566	NPT 1 1/4"	3 7/8	98	10.6	4.8
4PWS07G15	28 3/32	713	NPT 1 1/4"	3 7/8	98	13.4	6.1
4PWS07G20	33 1/32	839	NPT 1 1/4"	3 7/8	98	19.7	8.9

C* : Diámetro máximo de la bomba cuando es ensamblada con un cable de alimentación