


4PWS10G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

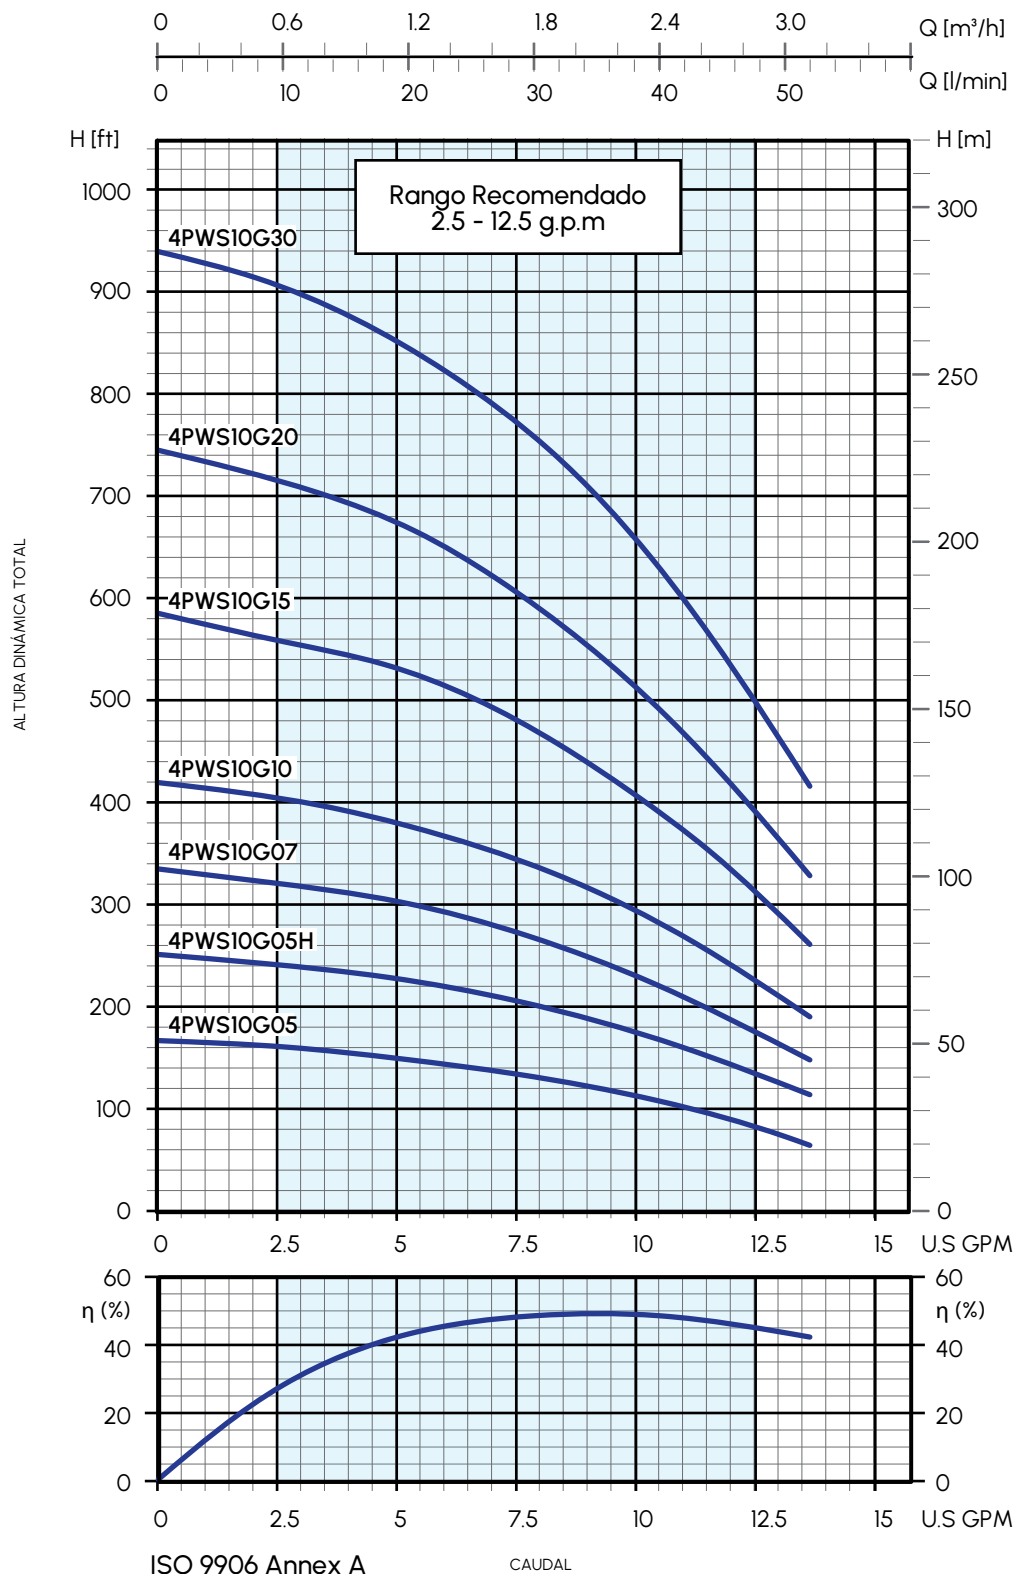

DESCARGA
1 1/4"




4PWS10G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL											
				l/min 0		9.5		18.9		28.4		37.9		47.3	
				gpm 0		2.5		5.0		7.5		10.0		12.5	
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES											
				M	FT	M	FT	M	FT	M	FT	M	FT	M	FT
4PWS10G05	6	0.37	0.5	50	165	49	160	46	150	41	135	35	115	25	82
4PWS10G05H	9	0.37	0.5	76	250	73	240	68	223	63	205	53	175	41	135
4PWS10G07	12	0.5	0.75	103	337	95	311	92	301	84	275	70	230	54	177
4PWS10G10	15	0.75	1	128	420	123	402	116	380	105	343	90	295	69	225
4PWS10G15	21	1.1	1.5	178	585	171	560	157	515	146	480	123	405	95	312
4PWS10G20	27	1.5	2	226	742	218	715	205	672	184	605	156	513	119	390
4PWS10G30	34	2.2	3	287	940	277	907	259	850	235	770	201	660	152	500

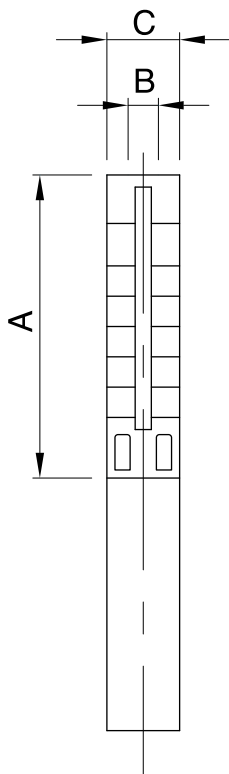

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS10G05	11 1/2	293	NPT 1 1/4"	3 7/8	98	5.3	2.4
4PWS10G05H	14 1/32	356	NPT 1 1/4"	3 7/8	98	6.6	3.0
4PWS10G07	16 1/32	419	NPT 1 1/4"	3 7/8	98	8.0	3.6
4PWS10G10	18 31/32	482	NPT 1 1/4"	3 7/8	98	9.3	4.2
4PWS10G15	23 15/16	608	NPT 1 1/4"	3 7/8	98	11.7	5.3
4PWS10G20	28 29/32	734	NPT 1 1/4"	3 7/8	98	14.1	6.4
4PWS10G30	35 19/32	904	NPT 1 1/4"	3 7/8	98	22.1	10.0

C : Diámetro máximo de la bomba cuando es ensamblada con un cable de alimentación