


4PWS18G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

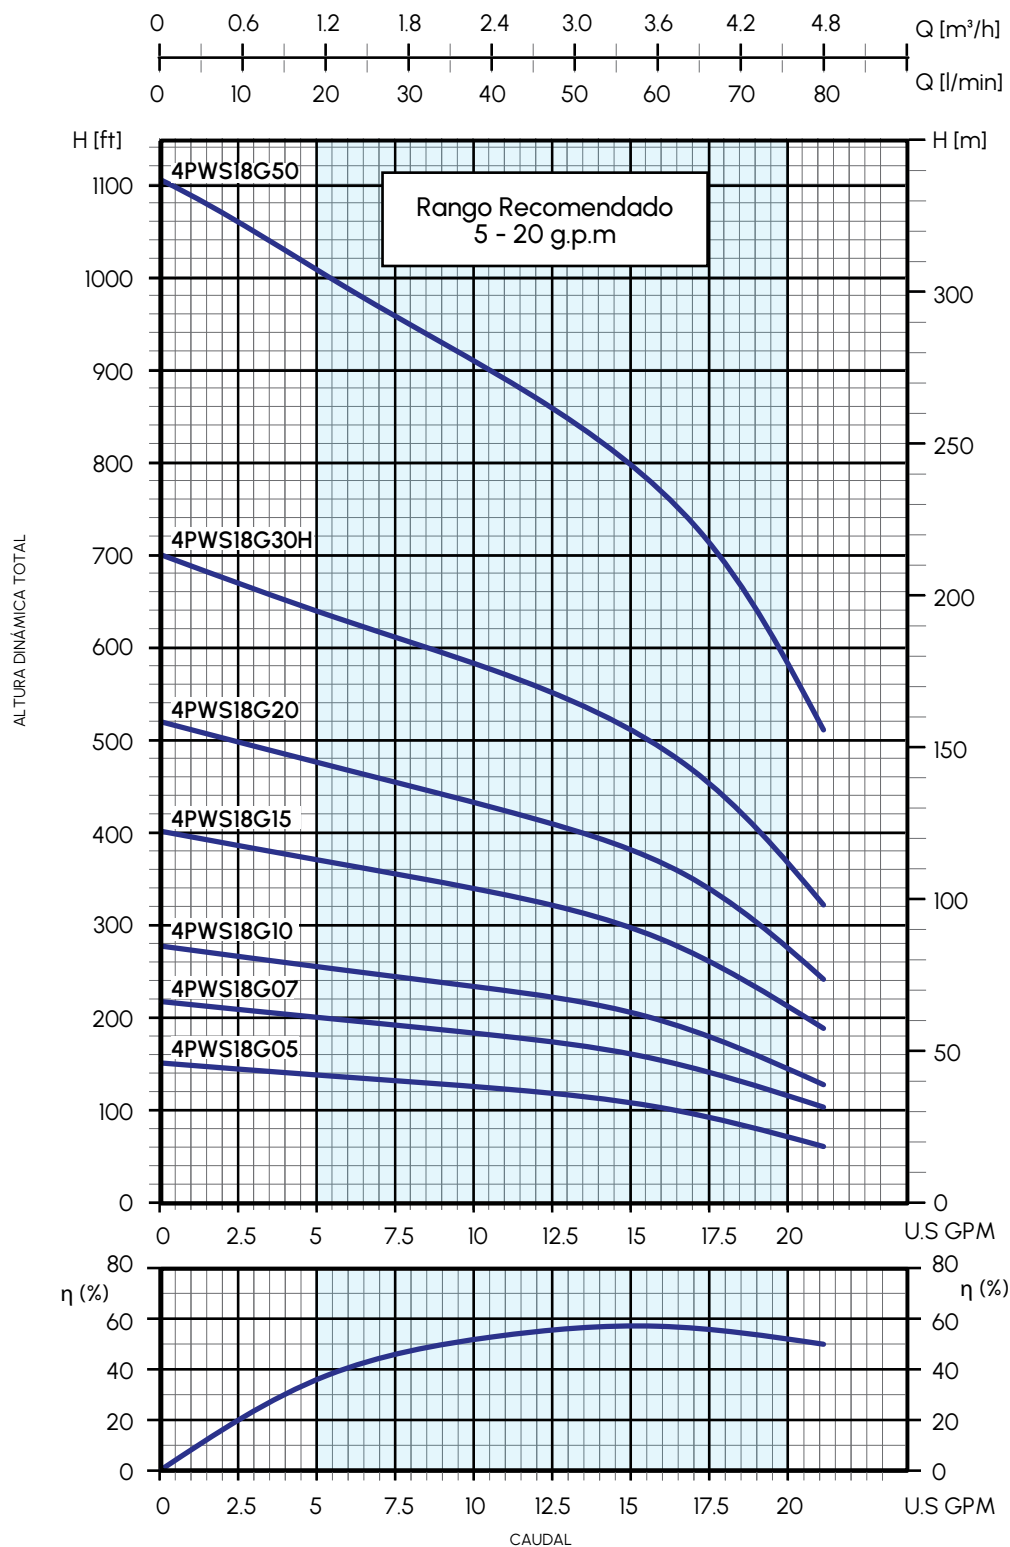

DESCARGA
1 1/4"




4PWS18G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL																	
				l/min 0		9.5		18.9		28.4		37.9		47.3		56.8		66.2		75.7	
				gpm 0		2.5		5.0		7.5		10.0		12.5		15.0		17.5		20.0	
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES																	
				M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT
4PWS18G05	5	0.37	0.5	46	150	43	142	42	139	40	132	38	125	36	118	34	110	28	92	21	70
4PWS18G07	7	0.5	0.75	67	219	63	208	61	200	59	192	55	182	54	178	49	160	42	138	37	120
4PWS18G10	9	1	1	85	278	82	268	78	257	74	242	72	237	67	221	62	204	55	180	43	142
4PWS18G15	13	1.1	1.5	122	400	117	385	113	370	109	358	104	340	95	310	91	299	79	260	65	212
4PWS18G20	17	1.5	2	159	520	152	500	145	477	140	458	132	432	125	410	116	380	104	340	83	273
4PWS18G30H	23	2.2	3	213	700	204	670	195	640	186	610	177	580	168	550	155	510	140	458	111	363
4PWS18G50	36	3.7	5	337	1104	320	1050	307	1008	292	958	277	910	262	858	244	800	216	710	177	580

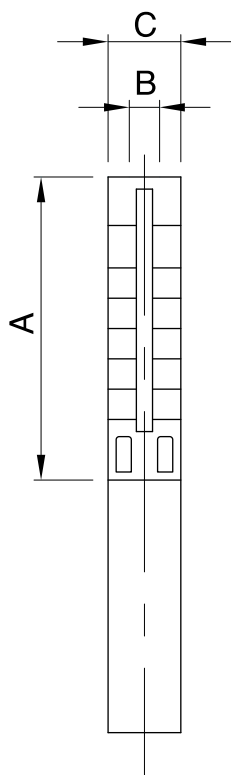

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS18G05	10 23/32	272	NPT 1 1/4"	3 7/8	98	5.1	2.3
4PWS18G07	12 3/8	314	NPT 1 1/4"	3 7/8	98	5.8	2.6
4PWS18G10	14 1/32	356	NPT 1 1/4"	3 7/8	98	6.6	3.0
4PWS18G15	17 11/32	440	NPT 1 1/4"	3 7/8	98	8.4	3.8
4PWS18G20	20 5/8	524	NPT 1 1/4"	3 7/8	98	10.0	4.5
4PWS18G30H	25 19/32	650	NPT 1 1/4"	3 7/8	98	12.6	5.7
4PWS18G50	37 1/4	946	NPT 1 1/4"	3 7/8	98	20.3	9.2

C : Diámetro máximo de la bomba cuando es ensamblada con un cable de alimentación