


4PWS25G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

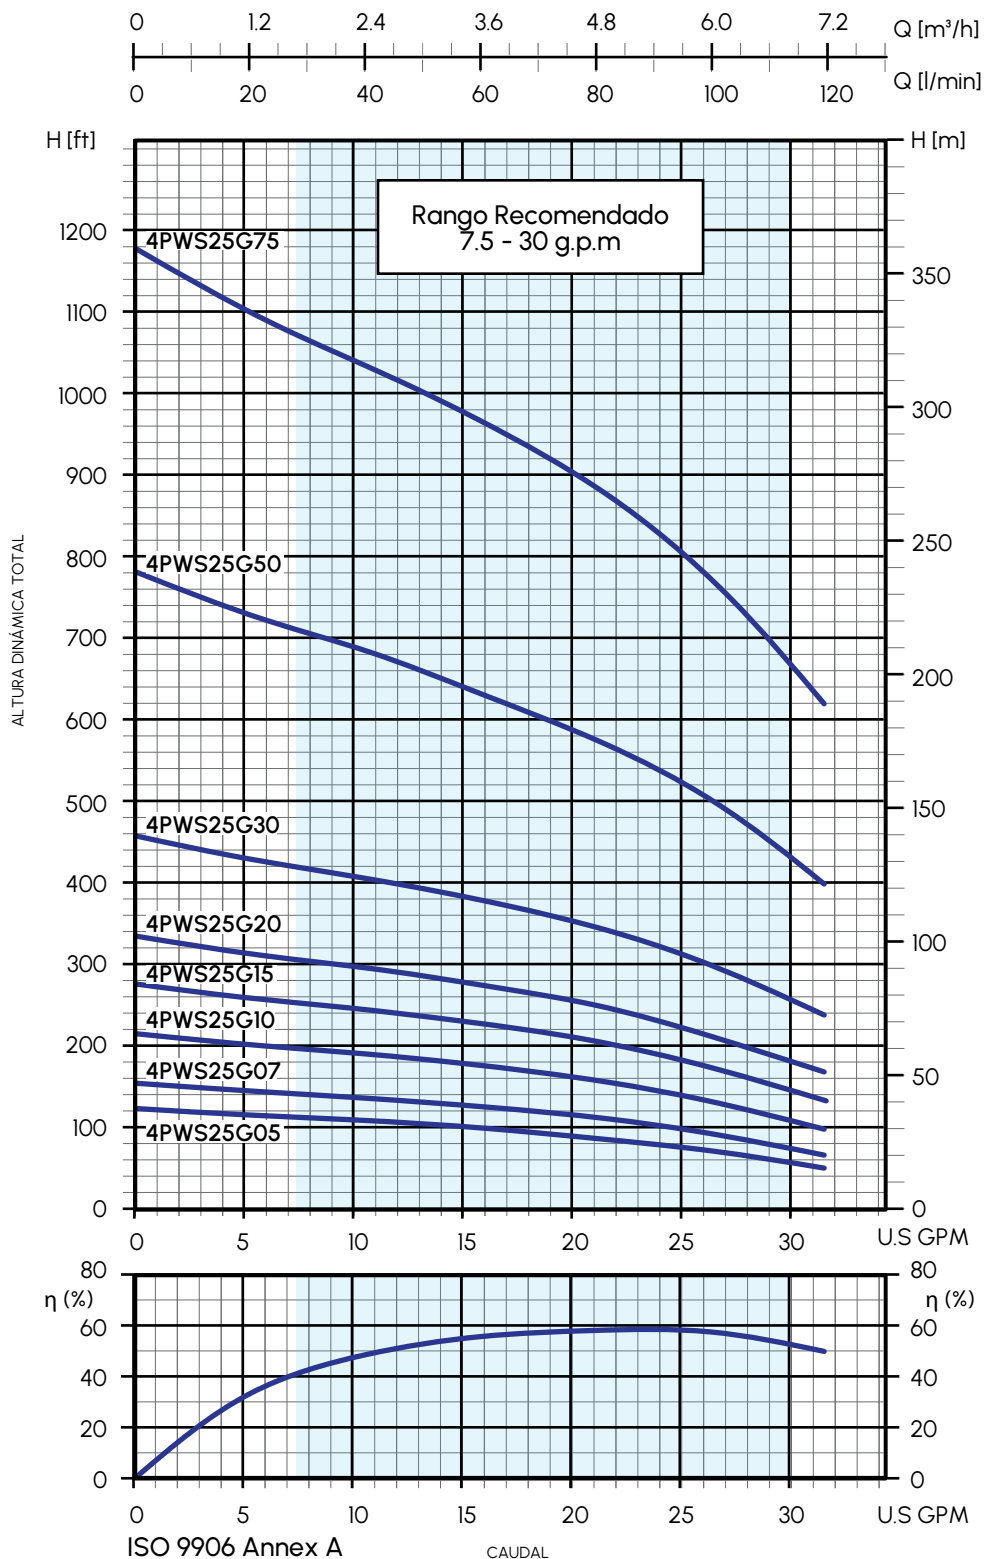

DESCARGA
1 1/2"




4PWS25G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL															
				l/min 0		18.9		37.9		56.8		75.7		94.6		113.6			
				gpm 0		5.0		10.0		15.0		20.0		25.0		30.0			
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES															
				M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT
4PWS25G05	4	0.37	0.5	37	122	36	118	33	108	30	100	29	95	23	77	18	60		
4PWS25G07	5	0.5	0.75	48	158	44	145	42	138	38	124	36	118	30	100	24	78		
4PWS25G10	7	0.75	1	63	208	61	200	58	190	55	180	49	160	43	140	34	110		
4PWS25G15	9	1.1	1.5	85	278	79	260	75	245	70	230	64	210	55	182	44	145		
4PWS25G20	11	1.5	2	103	338	97	318	91	300	85	278	79	258	68	222	55	180		
4PWS25G30	15	2.2	3	140	460	131	430	124	408	117	383	108	353	96	315	79	258		
4PWS25G50	26	3.7	5	238	780	224	735	210	690	195	640	179	587	159	521	131	430		
4PWS25G75	39	5	7.5	360	1180	335	1100	317	1040	297	975	275	902	245	802	203	665		

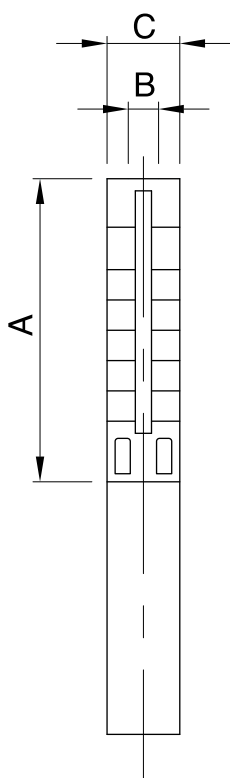

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS25G05	9 7/8	251	NPT 1 1/4"	3 7/8	98	4.4	2.0
4PWS25G07	10 23/32	272	NPT 1 1/4"	3 7/8	98	4.9	2.2
4PWS25G10	12 3/8	314	NPT 1 1/4"	3 7/8	98	5.8	2.6
4PWS25G15	14 1/32	356	NPT 1 1/4"	3 7/8	98	6.6	3.0
4PWS25G20	15 11/16	398	NPT 1 1/4"	3 7/8	98	7.5	3.4
4PWS25G30	18 31/32	482	NPT 1 1/4"	3 7/8	98	9.1	4.1
4PWS25G50	28 3/32	713	NPT 1 1/4"	3 7/8	98	13.7	6.2
4PWS25G75	39 5/32	994	NPT 1 1/4"	3 7/8	98	24.5	11.1