


4PWS70G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Curvas de Rendimiento

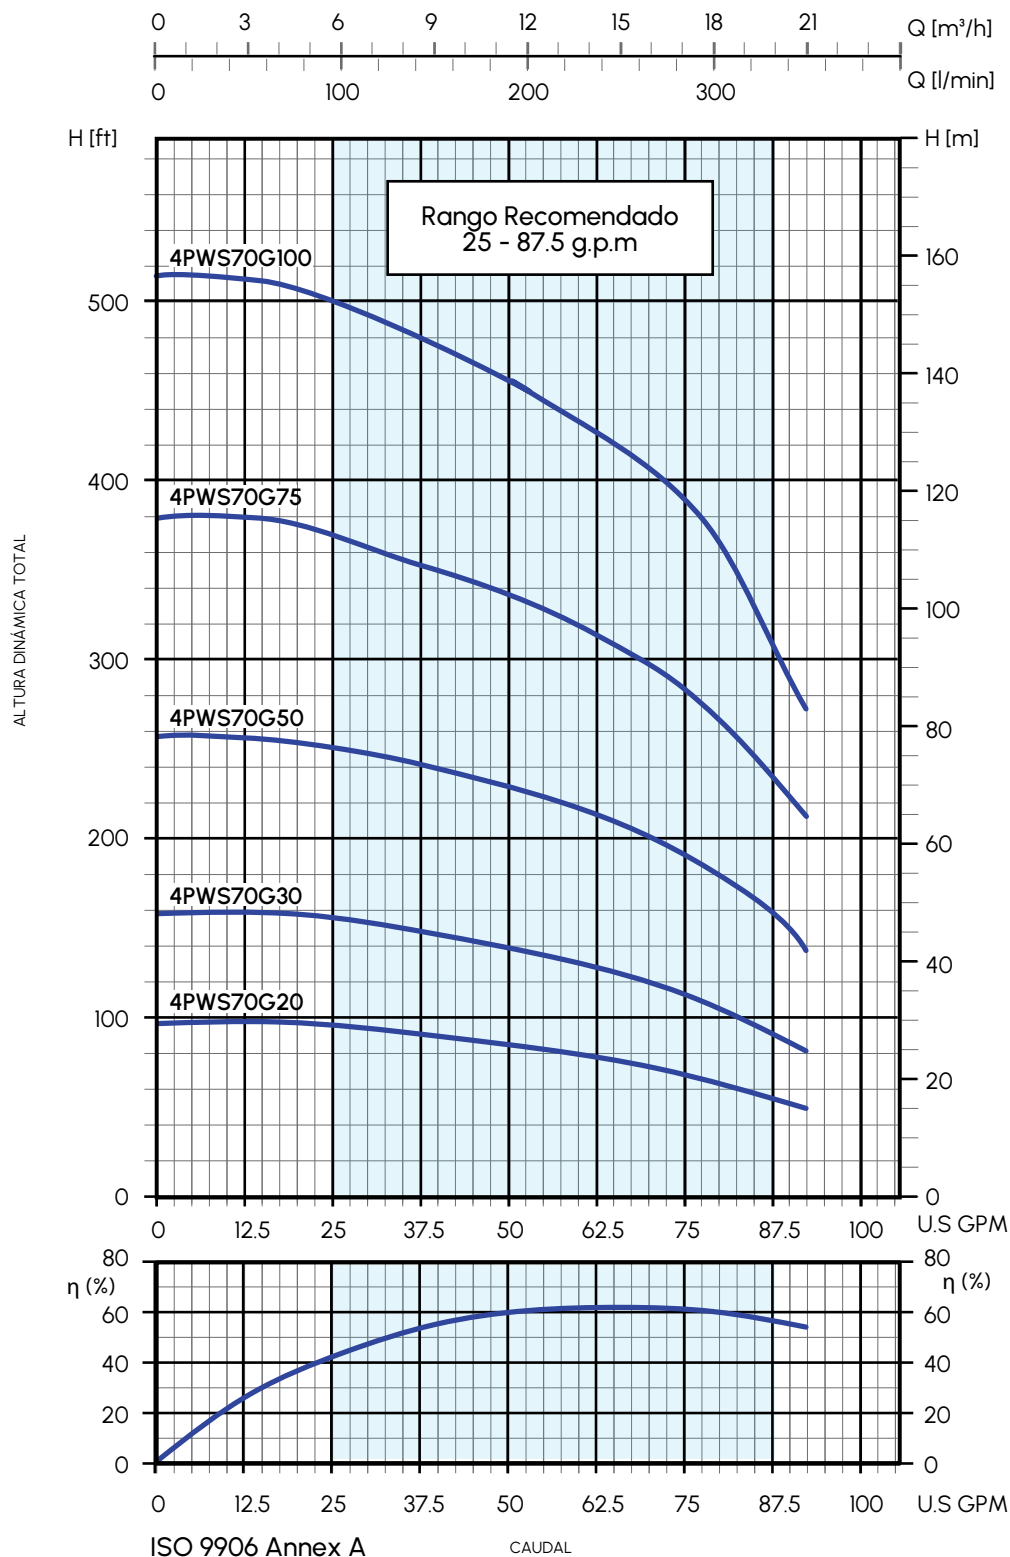

DESCARGA
2"




4PWS70G

BOMBAS SUMERGIBLES DE 4"
EN ACERO INOXIDABLE



Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL															
				l/min 0		47.3		94.6		142.0		189.3		236.6		283.9		331.2	
				gpm 0		12.5		25.0		37.5		50.0		62.5		75.0		87.5	
		KW	HP	H = ALTURA TOTAL EN METROS / ALTURA TOTAL EN PIES															
				M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT
4PWS70G20	3	1.5	2	30	99	30	98	30	97	27	90	26	85	24	78	21	69	17	55
4PWS70G30	5	2.2	3	49	160	49	160	48	157	45	149	43	140	40	132	35	115	27	90
4PWS70G50	8	3.7	5	79	260	79	258	76	250	73	240	70	230	65	213	59	192	47	155
4PWS70G75	12	5	7.5	115	380	115	380	112	367	107	350	102	335	95	310	86	282	73	240
4PWS70G100	16	7.5	10	157	515	157	514	152	500	145	475	137	450	127	415	112	368	91	300

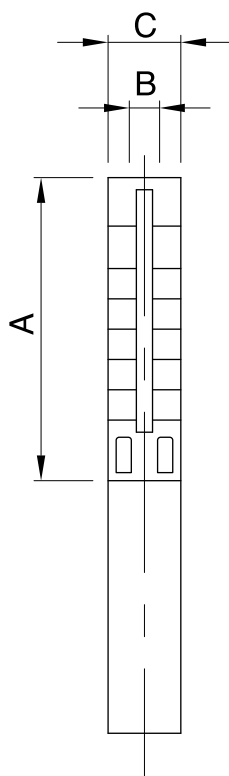

Dimensiones

MODELO	DIMENSIONES IN/MM					PESO NETO	
	A		B	C*			
	IN	MM	IN	IN	MM	LBS	KG
4PWS70G20	14 25/32	375	NPT 2"	3 7/8	98	8.2	3.7
4PWS70G30	19 7/8	505	NPT 2"	3 7/8	98	11.1	5.0
4PWS70G50	27 9/16	700	NPT 2"	3 7/8	98	15.5	7.0
4PWS70G75	37 3/16	960	NPT 2"	3 7/8	98	21.0	9.5
4PWS70G100	48 1/32	1220	NPT 2"	3 7/8	98	26.7	12.1

C : Diámetro máximo de la bomba cuando es ensamblada con un cable de alimentación